




We Make The Difference



II 2G Ex h IIB T4 Gb  
II 2D Ex h IIIB T135°C Db  
Baseefa15ATEX13DR/RN3

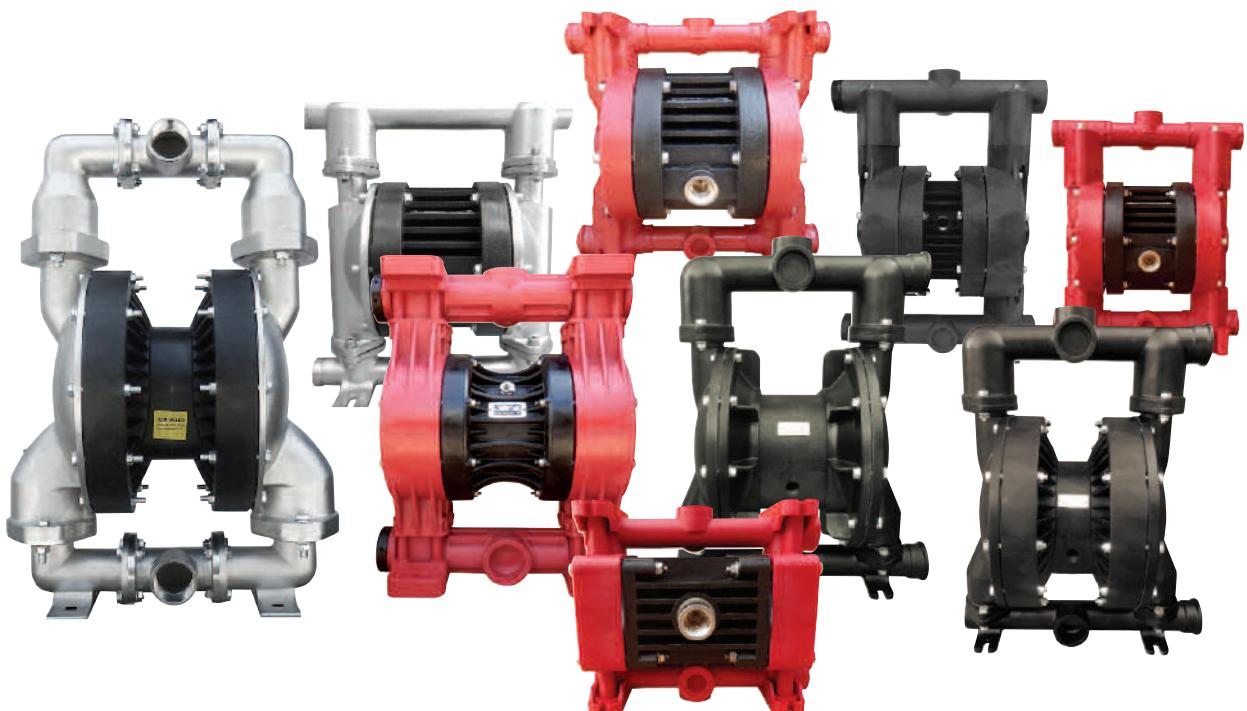

Ruby Air Operated  
Diaphragm Pumps

# Ruby Air Operated Diaphragm pumps



New pump line with a brand new designing that offers reinforced pumping potentials. The updated designing provides the possibility to use also other materials at the hydraulic parts without decreasing the efficiency in pressure. Plus, it offers even bigger performance provided with economy

## Ruby Pumps composition codes

Model	Pump Body	Center Section	Diaphragms	Ball Seats	Valve Ball	O-ring	Other Options
MINI 005	P: PP	P: PP	N: NBR Conductive	V: PVDF	T: PTFE	T: PTFE	F: Flange
MINI 017	V: PVDF+CF	A: Aluminum	E: EPDM Conductive	S: AISI 316	S: AISI 316	F: VITON	PN10/ANSI150
Ruby 010	A: Aluminum	PC: PP+CF	F: VITON Conductive	T: PTFE	N: NBR	E: EPDM	D: Twin Manifod
Ruby 012	S: Stainless Steel 316	W: PP FDA	T: PTFE+back up (EPDM Conductive)	A: Aluminum	E: EPDM	N: NBR	
Ruby 015	PC: PP+CF		Z: PTFE A+back up (EPDM Conductive)	P: PP			
Ruby 115			ST: PTFE+back up (SANTOPRENE)	N: NBR			
Ruby 115			HY: PTFE+ back up (HYTREL)	E: EPDM			
Ruby 020			NT: PTFE+Back up (NBR)	O: POM-C			
Ruby 120							
Ruby 025							
Ruby 125							
Ruby 040							
Ruby 140							
Ruby 050							
Ruby 150							
Ruby 051							
Ruby 080							
Ruby 081							

## Main features

### Available in PP, PP+CF, PVDF+CF, ALUMINUM and STAINLESS STEEL 316

- Use in potentially explosive atmospheres (conductive series)




II 2 D Ex h IIIB 135 °C Db  
Bassefa15ATEX13DR/RN3

- Optimal performance
- Economical air consumption, ecological designing
- High efficiency for pressure/capacity
- Oil free operation
- No freezing
- New air valve designing, fully controlled air passing
- Easy disassembling and re-assembling
- New generation diaphragms with embodied inner-outer piston

- New generation PTFE diaphragms of embodied type for long-life operation (compound)
- Advanced quality Full capacity PTFE-A diaphragms for high chemical and mechanical applications
- Potential to be submersible (on request)
- Possibility to be used in dirty environments due to their closed designing
- Easy manifold reverse
- Automatic suction
- Twin manifold option (two suction and two delivery)
- Excellent performance and value for money
- Ideal for abrasive, viscous, and shear sensitive media

# How it works

The Ruby diaphragm pump is an air-operated, positive displacement, self-priming pump. These drawings show flow pattern through the pump upon its initial stroke. It is assumed the pump has no fluid in it, prior to its initial stroke.

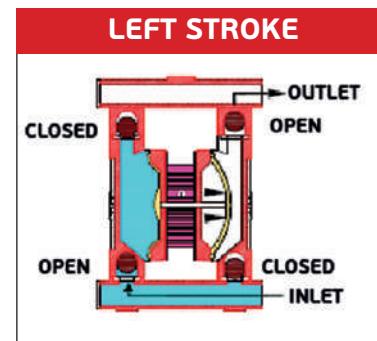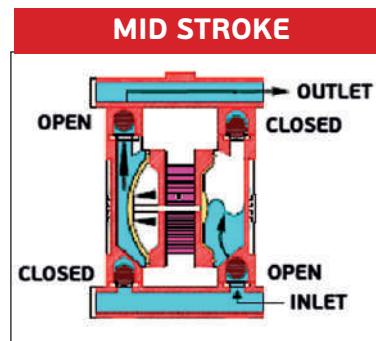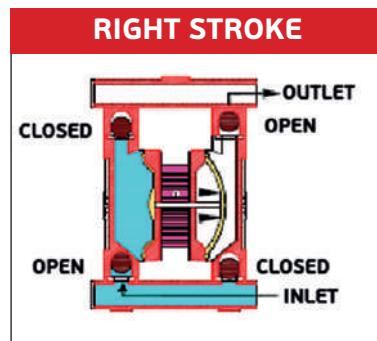


**FIGURE 1** The air valve directs pressurized air to the back side of diaphragm A. The compressed air is applied directly to the liquid column separated by elastomeric diaphragms. The diaphragm acts as a separation membrane between the compressed air and liquid, balancing the load and removing mechanical stress from the diaphragm. The compressed air moves the diaphragm away from the center block of the pump. The opposite diaphragm is pulled in by the shaft connected to the pressurized diaphragm. Diaphragm B is on its suction stroke; air behind the diaphragm has been forced out to the atmosphere through the exhaust port of the pump. The movement of diaphragm B toward the center block of the pump creates a vacuum within chamber B. Atmospheric pressure forces fluid into the inlet manifold forcing the inlet valve ball off its seat. Liquid is free to move past the inlet valve ball and fill the liquid chamber (see shaded area).

**FIGURE 2** When the pressurized diaphragm, diaphragm A, reaches the limit of its discharge stroke, the air valve redirects pressurized air to the back side of diaphragm B. The pressurized air forces diaphragm B away from the center block while pulling diaphragm A to the center block. Diaphragm B is now on its discharge stroke. Diaphragm B forces the inlet valve ball onto its seat due to the hydraulic forces developed in the liquid chamber and manifold of the pump. These same hydraulic forces lift the discharge valve ball off its seat, while the opposite discharge valve ball is forced onto its seat, forcing fluid to flow through the pump discharge. The movement of diaphragm A toward the center block of the pump creates a vacuum within liquid chamber A. Atmospheric pressure forces fluid into the inlet manifold of the pump. The inlet valve ball is forced off its seat allowing the fluid being pumped to fill the liquid chamber.

**FIGURE 3** At completion of the stroke, the air valve again redirects air to the back side of diaphragm A, which starts diaphragm B on its exhaust stroke. As the pump reaches its original starting point, each diaphragm has gone through one exhaust and one discharge stroke. This constitutes one complete pumping cycle. The pump may take several cycles to completely prime depending on the conditions of the application.

# Installation

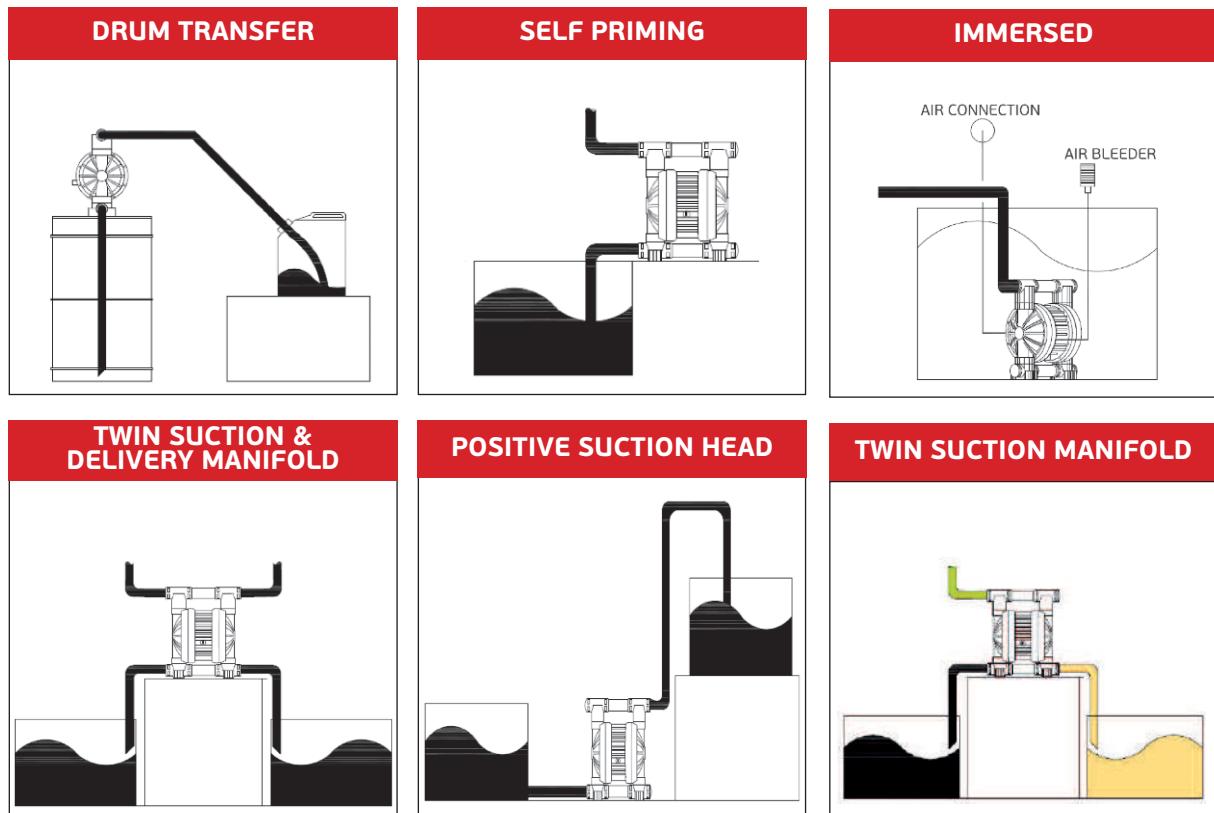

## ATEX Certificate



### AlphaDynamic

**PUMPS** has stored the documentation certifying ATEX compliance according to Directive 2014/34/EC for its ranges of Ruby air operated diaphragm pumps with the SGS Baseefa Limited certification body.

They are manufactured in a CONDUCT class II 2G h IIB T4 Gb and II 2D h IIIB 135°C Db.

The equipment user is responsible for classifying its area

On the other hand, the manufacturer shall identify and affix the certification class of the manufactured equipment.

## Advance Unified Diaphragms Featuring


- ✓ Easy installation and maintenance
- ✓ Excellent service life
- ✓ Inventory cost reduction
- ✓ Improved performance
- ✓ Greater displacement per cycle
- ✓ No center hole, elimination of potential leak paths.
- ✓ There is no need for the main axis to be insured
- ✓ They can be screwed and unscrewed without the use of tools



## Advance Unified Diaphragm Offers:

**The prominences decrease**  
the stretching of the PTFE during  
the regression and prevent it from cracking.

**Exclusive conical shape**  
provides excellent service life,  
suction lift and lower start-up pressure

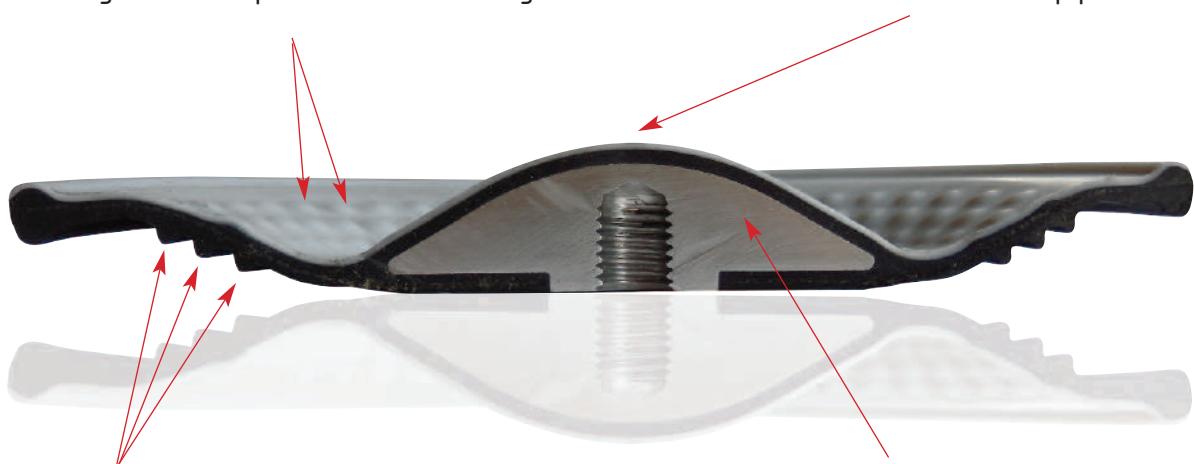

**Backing ribs sustain and guide**  
the diaphragm's flexibility for extended life  
and reduced cavitation on suction stroke

**Oversized integrated plate supports**  
nearly 50% of the diaphragm through  
the entire dynamic motion.

# Minipump 005

Construction materials: PP – PP+CF



**Minipump 005**

# Minipump 017

Construction materials: PP, PP+CF, ECTFE

## Technical data

### Minipump 005



### Minipump 017

ATEX Certificate	STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIB T135°C Db
Construction materials	PP, PP+CF
Intake/delivery connections	G 1/4"
Air connection	1/8"
Max. self-priming capacity	3 m
Max. flow rate	5 l/min
Max. head	70 m
Max. air supply pressure	7 bar
Diameter	0,5 mm
Max. operating temp.	60°C
Weight	0,5Kg
	PP, PP+CF: 60°C, ECTFE: 90°C
	1Kg, ECTFE 1,5Kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.



**Minipump 017**

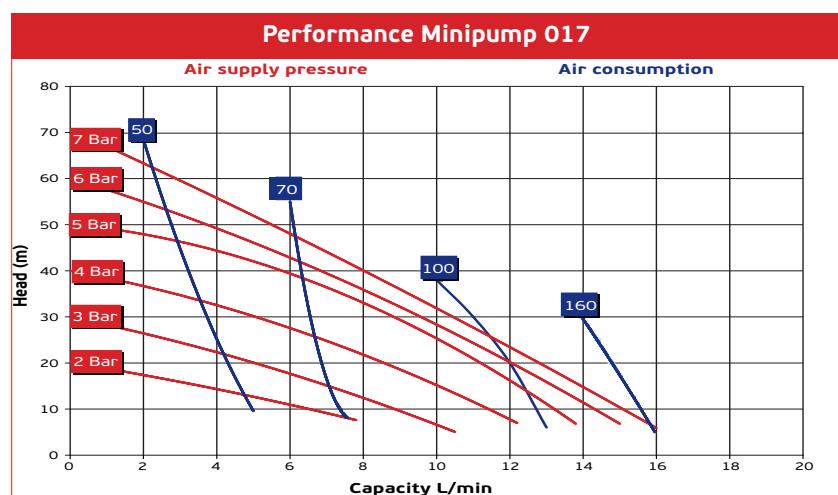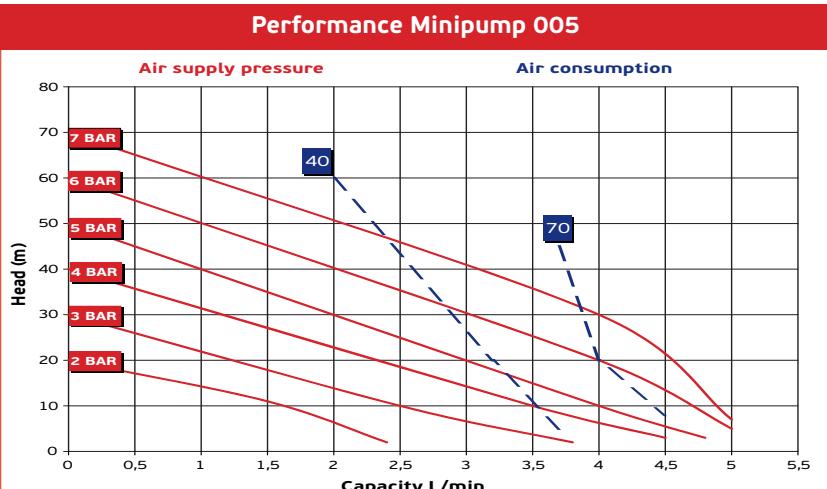




# Ruby 010

Construction materials: PP - PVDF- PP+CF -AISI 316

## Technical data

ATEX Certificate	 STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIB T135°C Db
Construction Materials	PP, PP+CF, PVDF+CF, AISI 316
Diaphragms	NT: TFM+Back up(NBR)
Intake/Delivery connections	3/8 "
Air Connection	3/8 "
*Max.self-priming capacity	4 m
*Max. Flow rate	21 L/min
Max. Head	70 m
Max. Air supply pressure	7 Bar
Max. Solids	0.5 mm
Max. Temperature	PP, PP+CF: 60 °C, PVDF: 95 °C, AISI316: 95 °C
Weight PP, PP+CF	1.2 Kg
Weight PVDF	1.9 Kg
Weight AISI 316	3.0 Kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

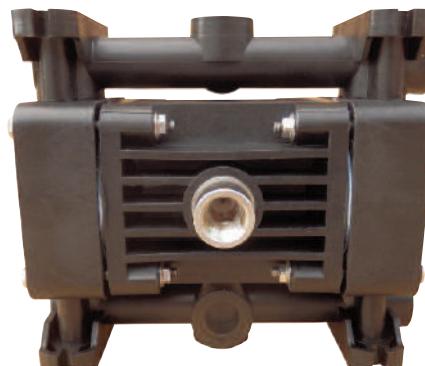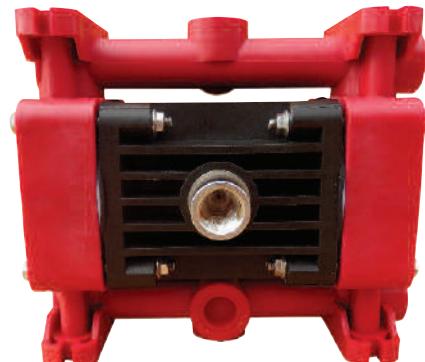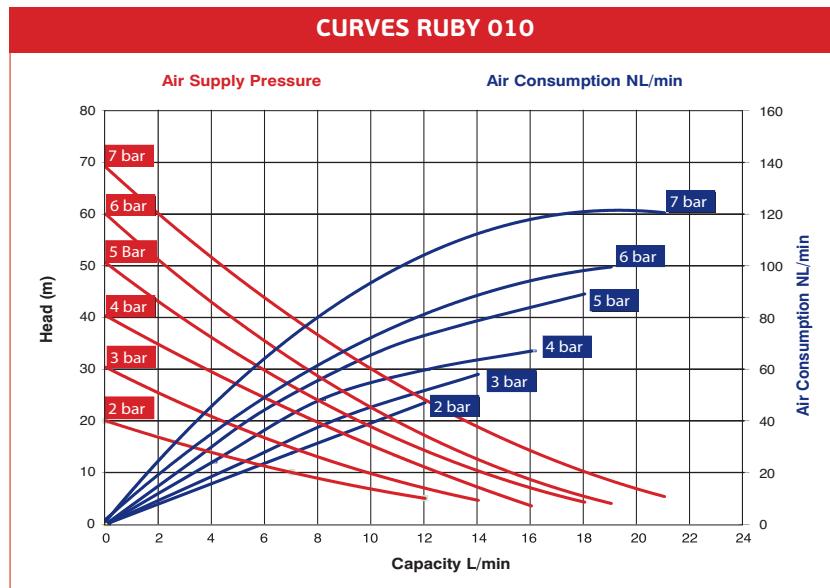

# Ruby 012 Pump

Construction materials: PP - PVDF- PP+CF

## Technical data




ATEX Certificate	STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Db CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	PP, PVDF+CF, PP+CF
Diaphragms	PTFE+back up (Santoprene) PTFE+back up (EPDM) SANTOPRENE HYTREL
Intake/delivery connections	G 1/2"
Air connection	1/4"
Max. self-priming capacity	4 m
Max. flow rate	30 L/min
Max. head	70 m
Max. air supply pressure	7 bar
Max. solid size (diameter)	2 mm
Max. operating temp.	PP, PP+CF: 60°C, PVDF: 95°C
Weight PP , PP+CF	1,6 Kg
Weight PVDF	1,9 Kg



\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

## CURVES RUBY 012

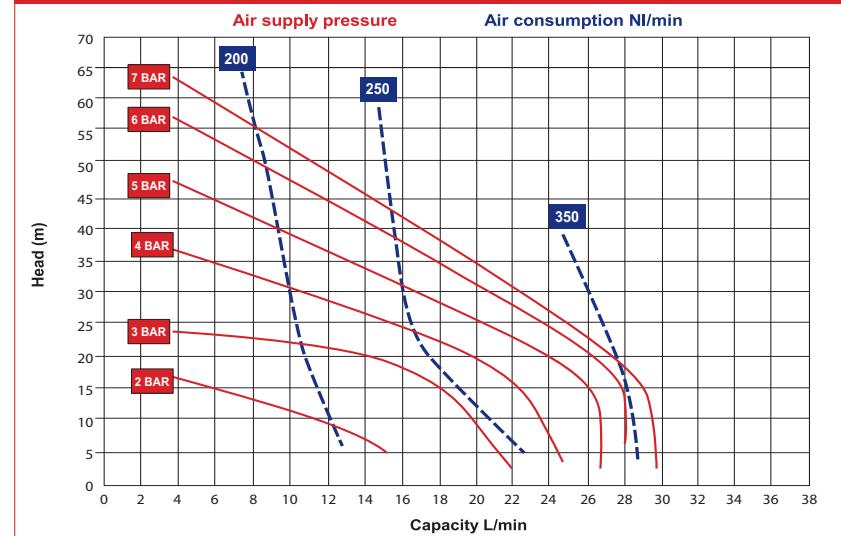

# Ruby 015 Pump

Construction materials: AISI 316


## Technical data

ATEX Certificate	 STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	AISI 316
	NBR Conductive EPDM Conductive
Diaphragms	Compound PTFE+Back up EPDM Conductive Compound PTFE A + Back up EPDM Conductive VITON Conductive
Intake/delivery connections	1/2" BSP G-Flange on Request
Air connection	1/2"
*Max. self-priming capacity	4 m
*Max. flow rate	72 L/min
Max. head	70 m
Max. air supply pressure	7 bar
Diameter	3,0 mm
Max. operating temp.	95 °C
Weight AISI 316	9,0 kg


\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.



CURVES RUBY 015 PTFE FULL CAPACITY FITTED

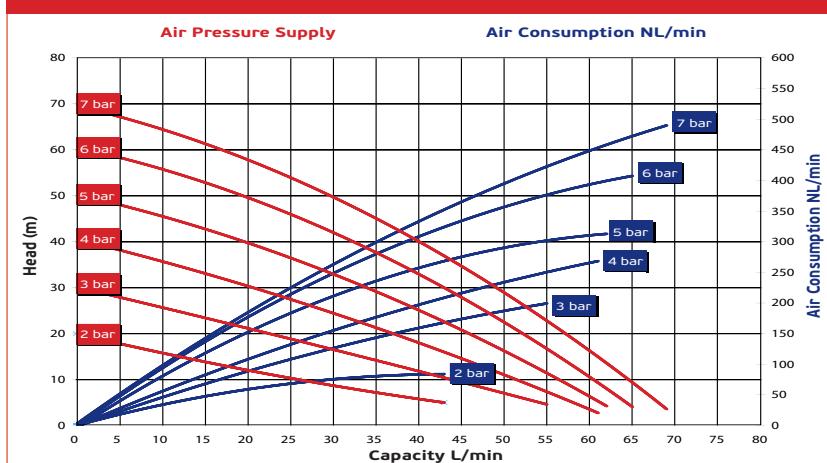

CURVES RUBY 015 RUBBER FITTED

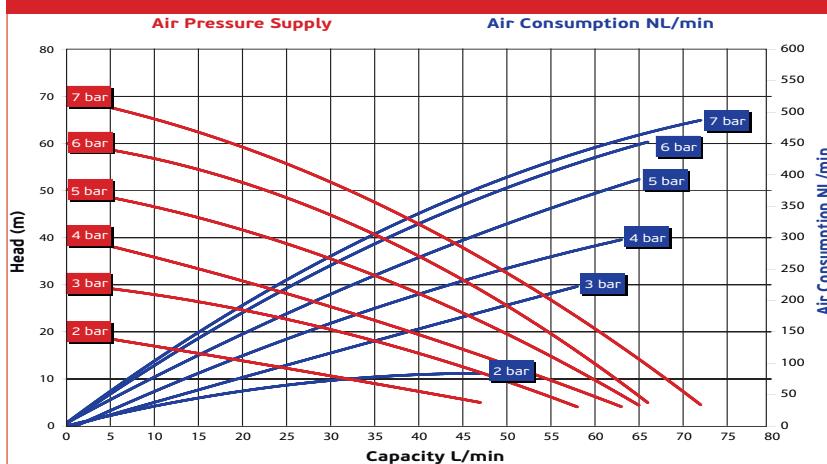

# Ruby 115



Construction materials: PP - PVDF+CF - ALUMINIUM - PP+CF



## Technical data

ATEX Certificate	STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	PP, PVDF+CF, ALUMINIUM, PP+CF NBR Conductive EPDM Conductive
Diaphragms	Compound PTFE+Back up EPDM Conductive Compound PTFE A + Back up EPDM Conductive VITON Conductive
Intake/delivery connections (standard)	G 1/2" BSP G – Flange on request
Air connection	1/2"
*Max. Self-priming capacity	3 m
*Max. flow rate	74 L/min
Max. head	80 m
Max. air supply pressure	8 bar
Max. solid size (diameter)	3,0 mm
Max. operating temperature	PP 60°C, PVDF+CF 95°C, Aluminium 95°C, PP+CF 60°C
Weight PP	4,0 kg
Weight PVDF	5,5 Kg
Weight Aluminium	6,0 kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

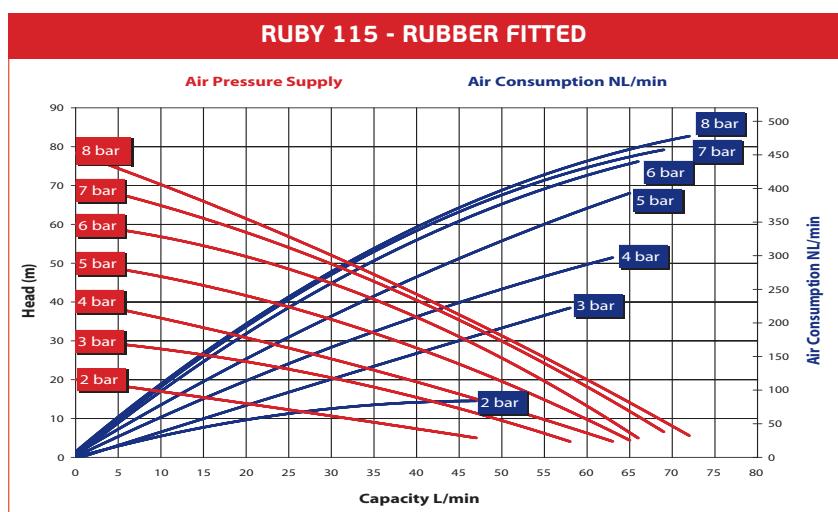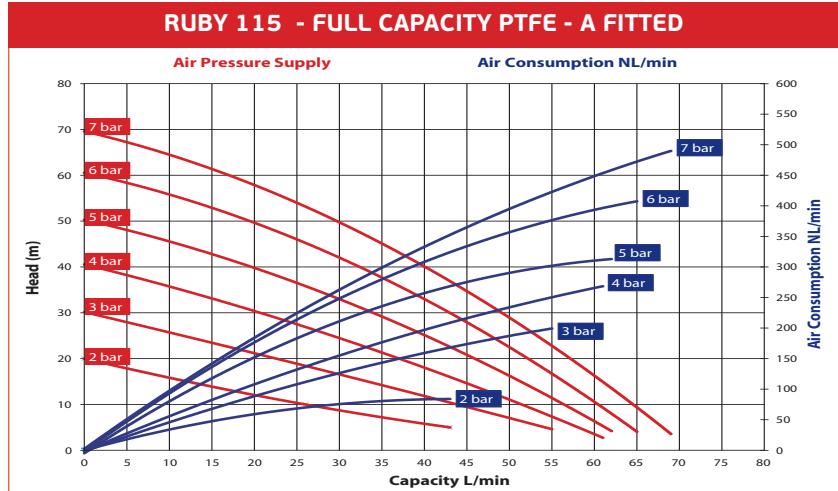




# Ruby O20 Pump

Construction materials: PP - PVDF - PP+CF

## Technical data

ATEX Certificate	 STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	PP, PVDF, PP+CF NBR Conductive EPDM Conductive
Diaphragms	Compound PTFE+Back up EPDM Conductive Compound PTFE A + Back up EPDM Conductive VITON Conductive
Intake/delivery connections	3/4" BSP G -Flange on Request
Air connection	1/2"
*Max. self-priming capacity	4 m
*Max. flow rate	117 L/min
Max. head	80 m
Max. air supply pressure	8 bar
Diameter	3,0 mm
Max. operating temp.	PP 60°C, PVDF 95°C
Weight PP	4,0 kg
Weight PVDF	5,5 Kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

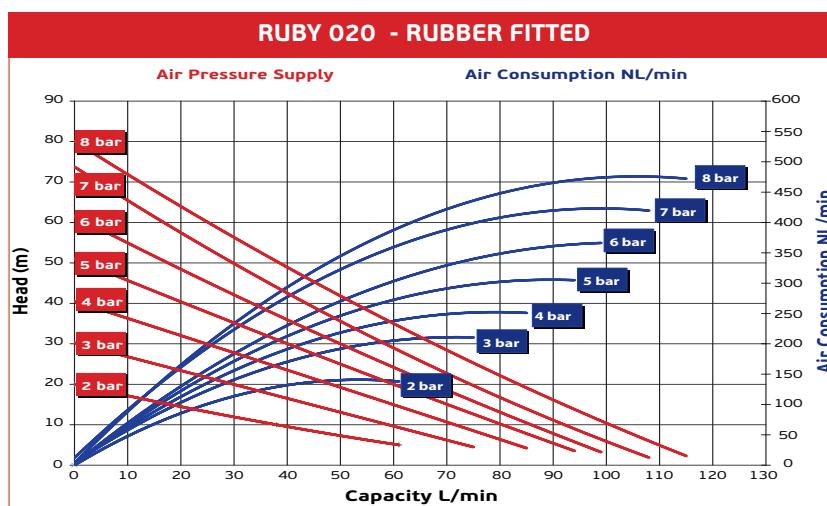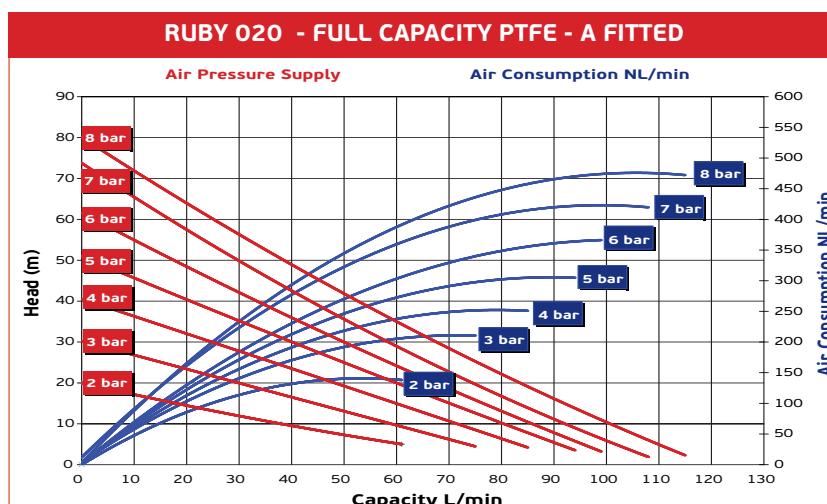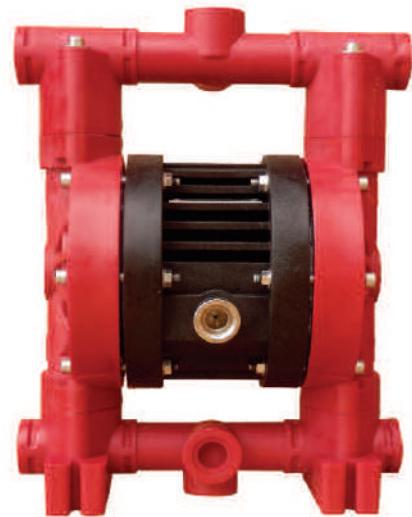

# Ruby 120



Construction materials: ALUMINIUM



## Technical data

ATEX Certificate	STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIB T135°C Db
Construction materials	Aluminum
Diaphragms	NBR Conductive EPDM Conductive Compound PTFE+Back up EPDM Conductive Compound PTFE A + Back up EPDM Conductive VITON Conductive
Intake/delivery connections	3/4" BSP G -Flange on Request
Air connection	1/2"
*Max. self-priming capacity	4 m
*Max. flow rate	117 L/min
Max. head	80 m
Max. air supply pressure	8 bar
Diameter	3,0 mm
Max. operating temp.	95°C
Weight	6,0 kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

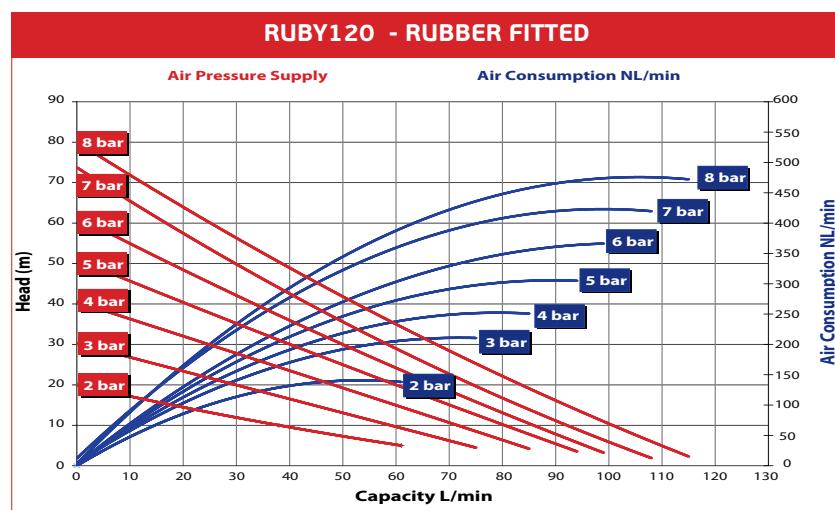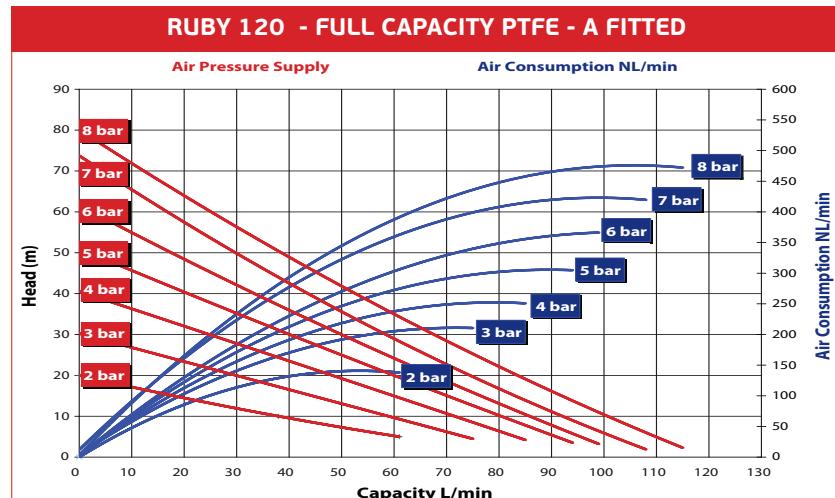

# Ruby 025 Pump


Construction materials: PP – PP+CF – PVDF+CF – AISI316

## Technical data


ATEX Certificate	 STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	PP, PP+CF, PVDF+CF, AISI316
Diaphragms	NBR Conductive EPDM Conductive Compound PTFE+Back up EPDM Conductive Compound PTFE A+Back up EPDM Conductive VITON Conductive
Intake/delivery connections	1" BSP G -Flange on Request
Air connection	1/2"
*Max. self-priming capacity	4 m
*Max. flow rate	175 l/min
Max. head	70 m
Max. air supply pressure	7 bar
Diameter	3,5 mm
Max. operating temp.	PP 60°C, PVDF 95°C, AISI 316 95°C, 130°C with Metallic center block
Weight PP	6,0 kg
Weight PVDF	7,0 Kg
Weight AISI 316	14,0 kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

### RUBY 025 - FULL CAPACITY PTFE - A FITTED

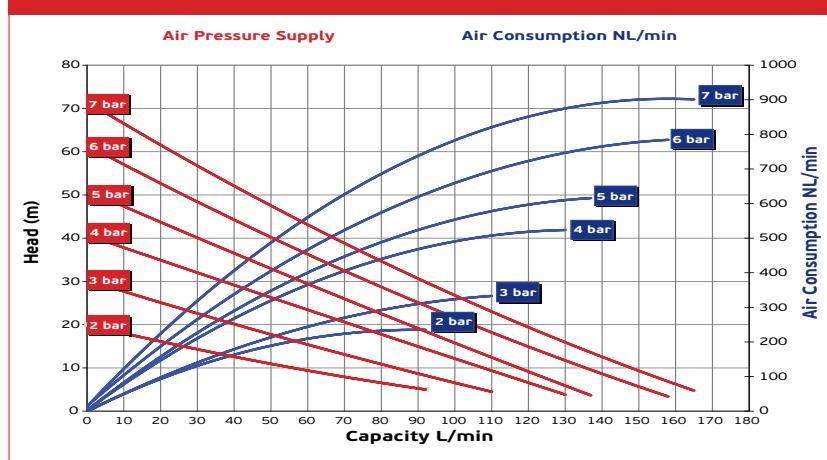

### RUBY 025 - RUBBER FITTED

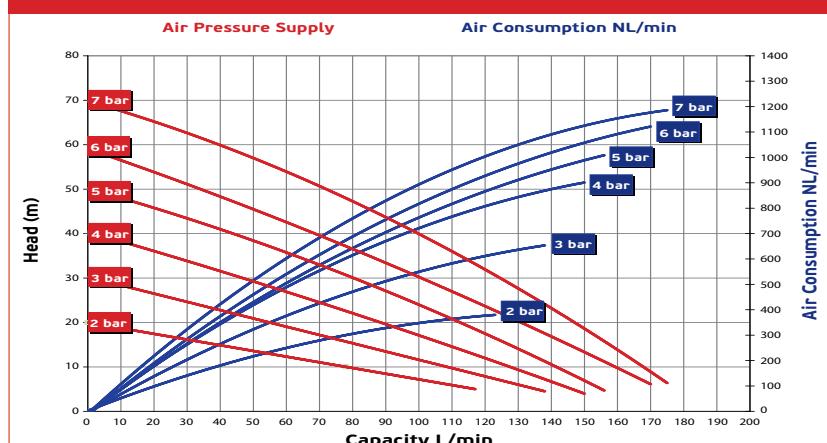

# Ruby 125



Construction materials: ALUMINIUM



## Technical data

ATEX Certificate	STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	ALUMINIUM
	NBR Conductive EPDM Conductive
Diaphragms	Compound PTFE+Back up EPDM Conductive Compound PTFE A + Back up EPDM Conductive VITON Conductive
Intake/delivery connections	1" BSP G -Flange on Request
Air connection	1/2"
*Max. self-priming capacity	5m
*Max. flow rate	185 L/min
Max. head	80 m
Max. air supply pressure	8 bar
Diameter	3,5 mm
Max. operating temp.	95°C - 130°C with Metallic center block
Weight Aluminium	8 kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

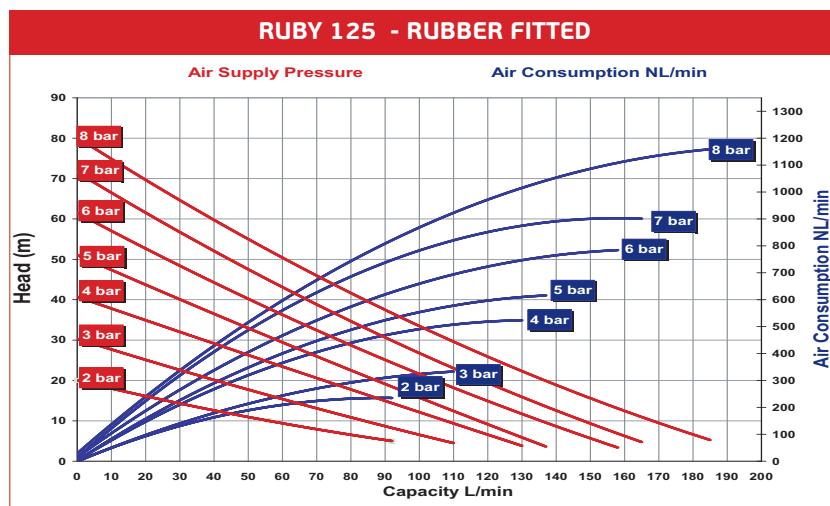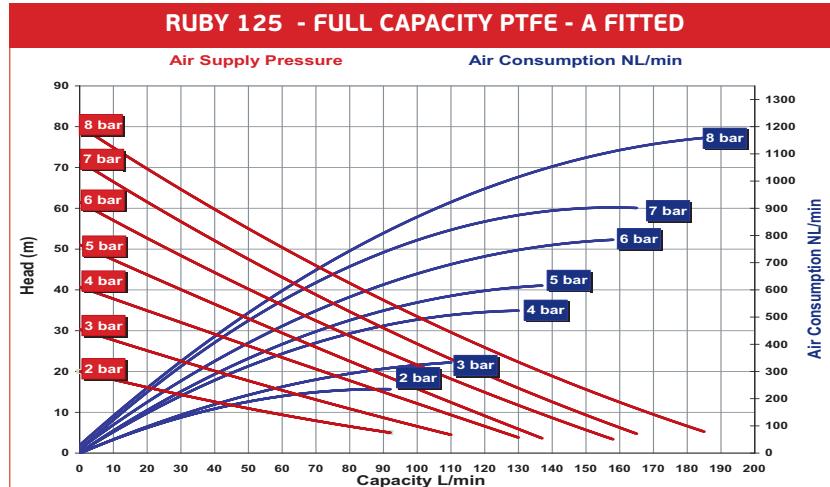



# Ruby 040 Pump

Construction materials: PP – PP+CF – PVDF+CF – AISI 316

## Technical data

ATEX Certificate	 STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	PP, PP+CF, PVDF+CF, AISI 316 NBR Conductive EPDM Conductive Compound PTFE+Back up EPDM Conductive Compound PTFE A + Back up EPDM Conductive VITON Conductive
Diaphragms	1 1/2 " BSP G -Flange on Request
Air connection	1/2 "
* Max self-priming capacity	5 m
* Max. flow rate	360 L/min
Max. solid size (diameter)	5mm
Max head	70 m
Max air supply	7 Bar
Max operating Temperature	PP: 60°C, PVDF: 95°C, AISI316: 95°C 130°C with Metallic center block
Weight PP	14 kg
Weight PVDF	22 kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

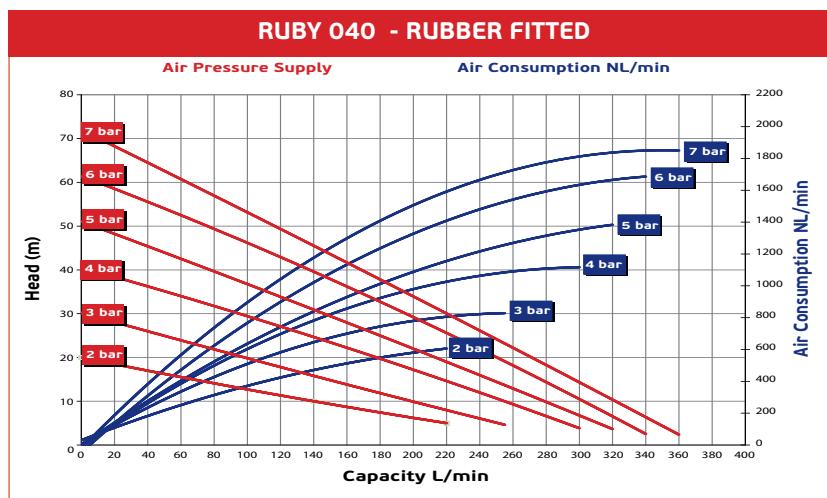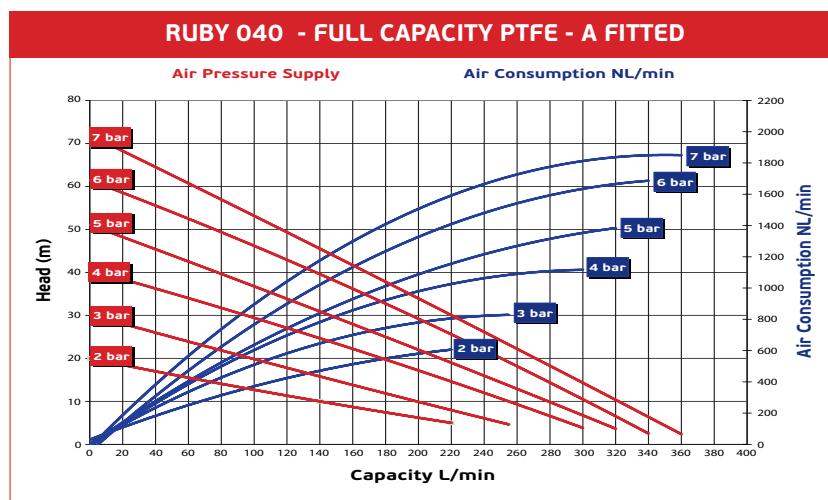

# Ruby 140 Pump



Construction materials: ALUMINIUM



## Technical data

ATEX Certificate	STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	ALUMINIUM
Diaphragms	NBR Conductive EPDM Conductive Compound PTFE+Back up EPDM Conductive Compound PTFE A + Back up EPDM Conductive VITON Conductive
Intake / delivery connections	1 1/2" BSP G - Flange on Request
Air connection	1/2 "
* Max self-priming capacity	5 m
* Max. flow rate	375 L/min
Max. solid size (diameter)	5mm
Max head	80 m
Max air supply	8 Bar
Max operating Temperature	95°C 130°C with Metallic center block
Weight	14 kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

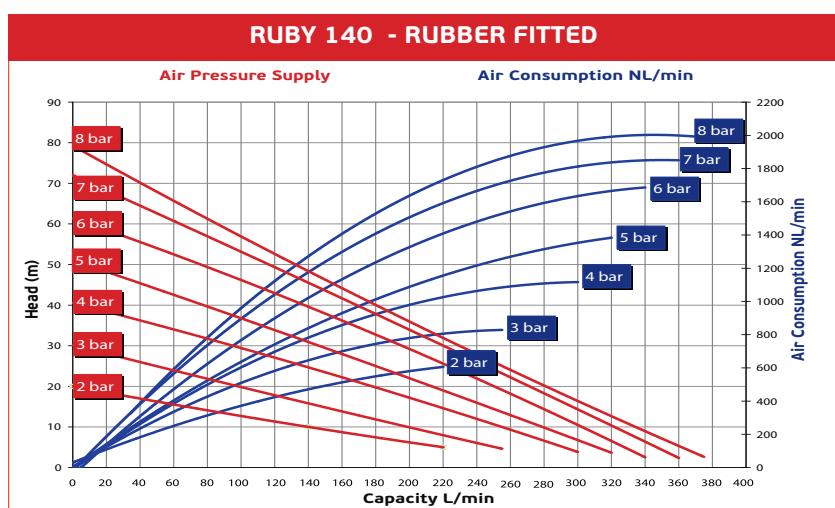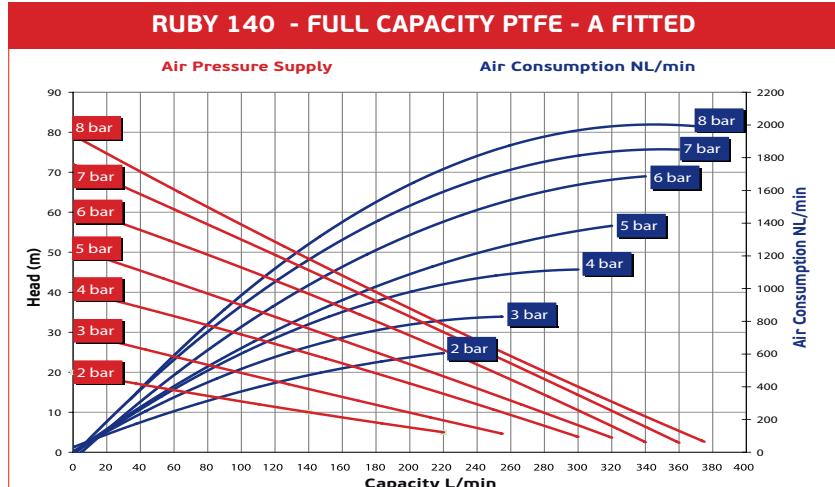

# Ruby 050 Pump


Construction materials: AISI 316

## Technical data


ATEX Certificate	 STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIB T135°C Db
Construction materials	AISI 316
	NBR Conductive
	EPDM Conductive
Diaphragms	Compound PTFE+Back up EPDM Conductive
	Compound PTFE A + Back up EPDM Conductive
	VITON Conductive
Intake/delivery connections	2" BSP G - Flange on Request
Air connection	3/4"
*Max. self-priming capacity	5 m
*Max. flow rate	696 L/min
Max. head	70 m
Max. air supply pressure	7 bar
Diameter	8 mm
Max. operating temp.	95°C
Weight AISI 316	70 Kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

### RUBY 050 - FULL CAPACITY PTFE FITTED

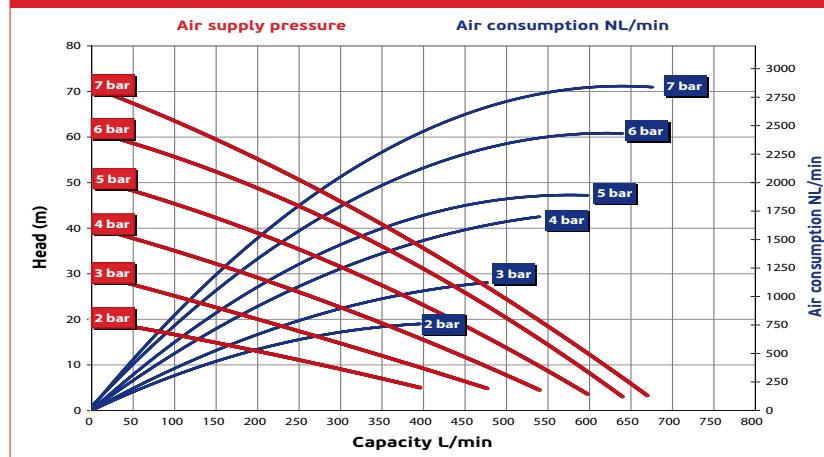

### RUBY 050 - RUBBER FITTED

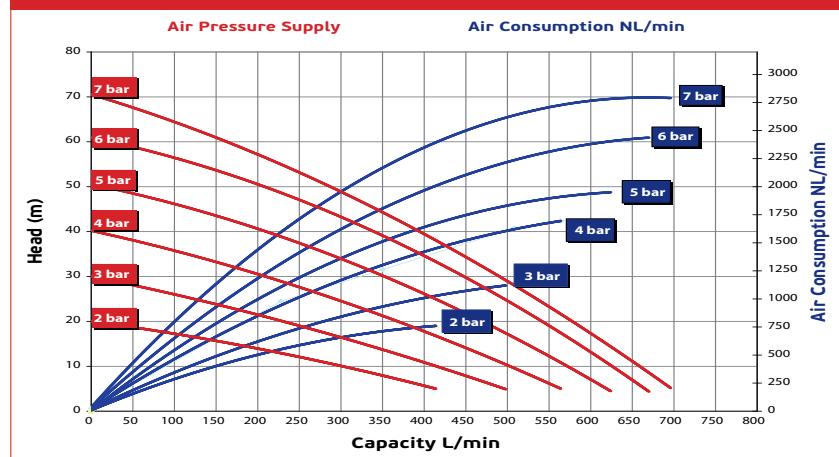

# Ruby 150 Pump



Construction materials: ALUMINIUM



## Technical data

ATEX Certificate	STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	ALUMINIUM NBR Conductive EPDM Conductive
Diaphragms	Compound PTFE+Back up EPDM Conductive Compound PTFE A + Back up EPDM Conductive VITON Conductive
Intake/delivery connections	2" BSP G - Flange on Request
Air connection	3/4"
*Max. self-priming capacity	5 m
*Max. flow rate	696 L/min
Max. head	80 m
Max. air supply pressure	8 bar
Diameter	8 mm
Max. operating temp.	95°C
Weight Aluminium	35 kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

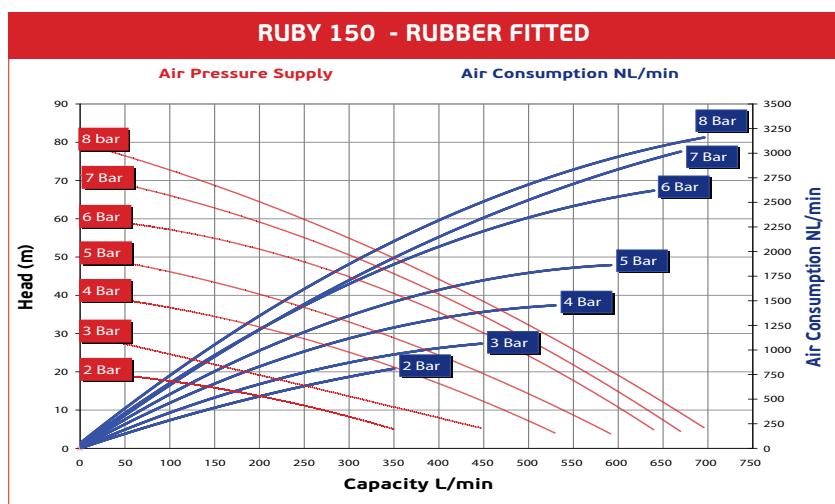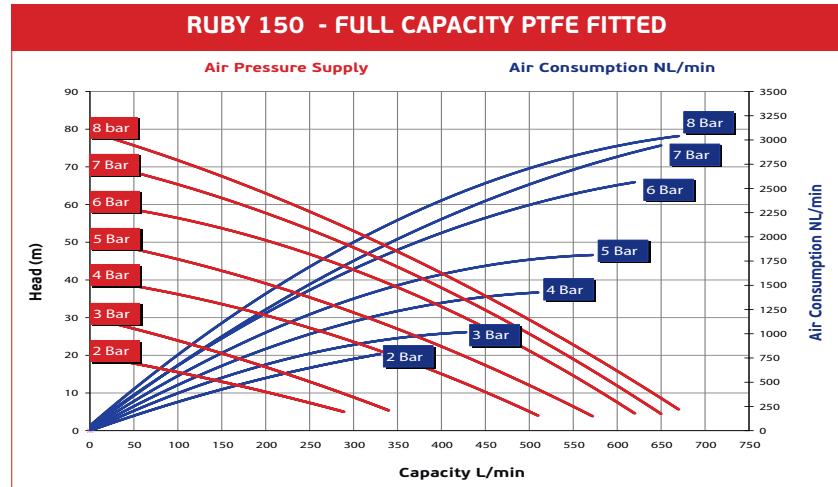

# Ruby 051 Pump

Construction materials: PP – PP+CF – PVDF+CF


## Technical data

ATEX Certificate	 STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	PP, PP+CF, PVDF+CF
Diaphragms	PTFE+back up (santoprene) PTFE+back up (Hytrel) NBR, EPDM, SANTOPRENE, HYTREL
Intake/delivery connections	1/2" BSP G – Flange on Request
Air connection	3/4"
Max. self-priming capacity	5 m
Max. flow rate	650 L/min
Max. head	70 m
Max. air supply pressure	7 bar
Max solid size (diameter)	8 mm
Max. operating temp.	PP 60°C, PVDF 95°C, P, P+CF 60°C
Weight PP	38 Kg
Weight PVDF	45 Kg



\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

### RUBY 051 - FULL CAPACITY PTFE FITTED

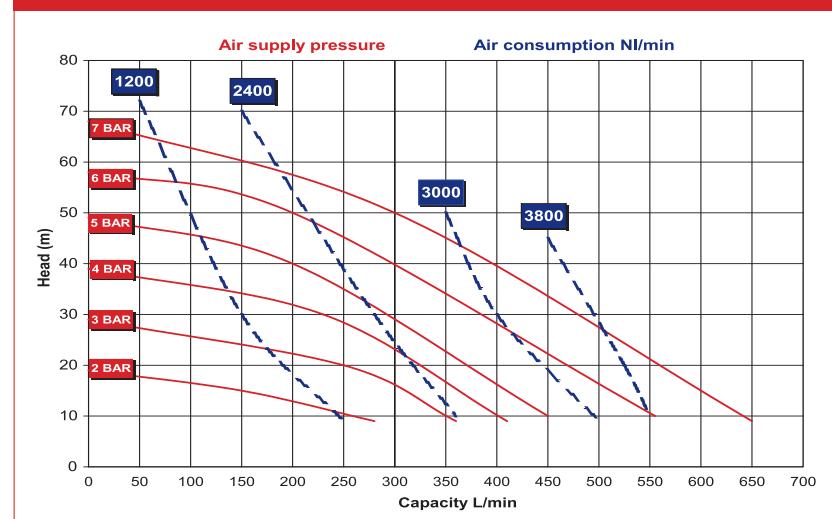

# Ruby 080 Pump



Construction materials: AISI 316



## Technical data

ATEX Certificate	STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	AISI 316
	NBR Conductive
	EPDM Conductive
Diaphragms	Compound PTFE+Back up EPDM Conductive
	Compound PTFE A + Back up EPDM Conductive
	VITON Conductive
Intake/delivery connections	3" BSP G - Flange on Request
Air connection	3/4"
*Max. self-priming capacity	5 m
*Max. flow rate	810 L/min
Max. head	70 m
Max. air supply pressure	7 bar
Diameter	8 mm
Max. operating temp.	95°C
Weight AISI 316	75 Kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

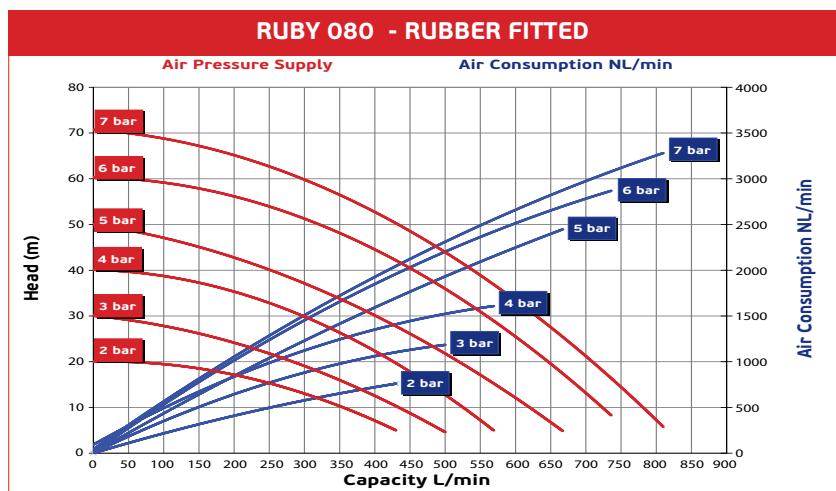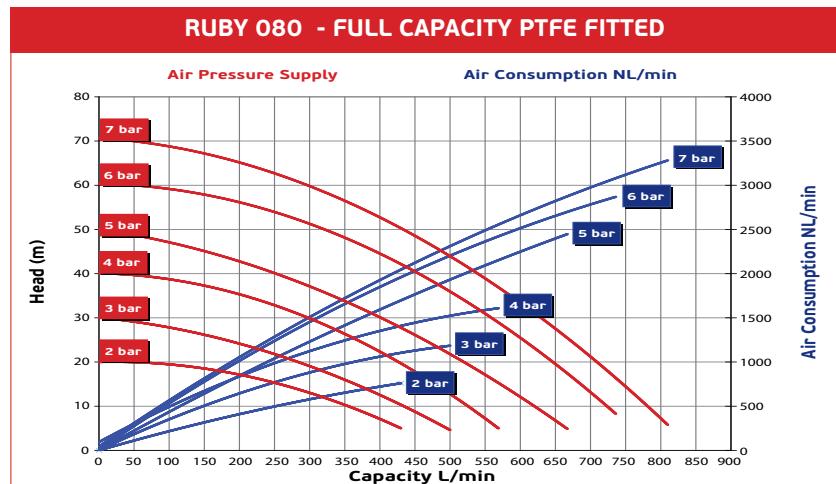

# Ruby 180

Construction materials: ALUMINIUM


## Technical data

ATEX Certificate	 STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIB T135°C Db
Construction Materials	ALUMINIUM
Diaphragms	NBR Conductive EPDM Conductive Compound PTFE+Back up EPDM Conductive Compound PTFE A + Back up EPDM Conductive VITON Conductive
Intake / Delivery connections	3" BSP G - Flange on request
Air Connection	3/4 "
*Max.self-priming capacity	5 m
*Max. Flow rate	850 L/min
Max. Head	80 m
Max.Air supply pressure	8 Bar
Max.Solids	8 mm
Max. Temperature	95°C
Weight	50 Kg


\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.



**RUBY 180 - FULL CAPACITY PTFE FITTED**

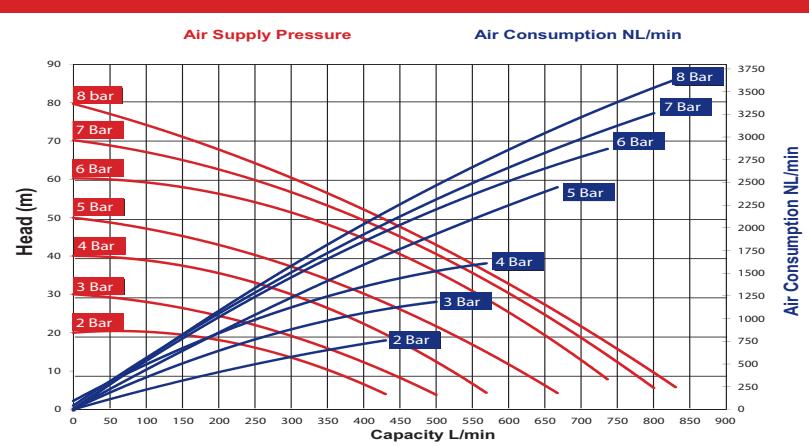

**RUBY 180 - RUBBER FITTED**

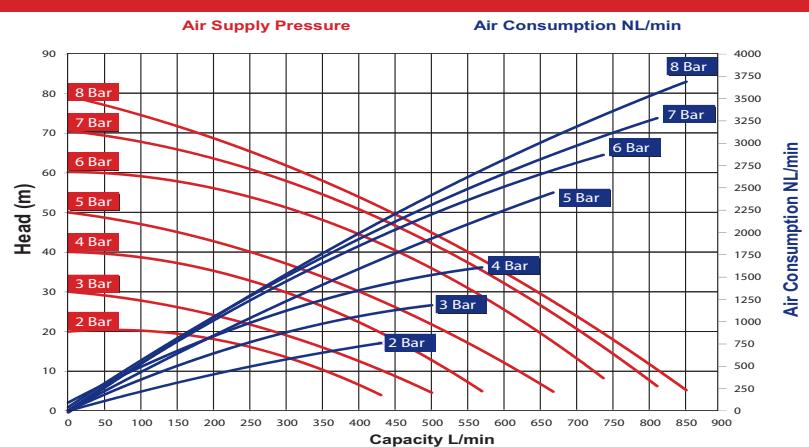

# Ruby 081 Pump


Construction materials: PP – PVDF – PP+CF

## Technical data




ATEX Certificate	STANDARD: II 3G Ex h IIB T4 Gc – II 3D Ex h IIIB T135°C Dc CONDUCT: II 2G Ex h IIB T4 Gb – II 2D Ex h IIIB T135°C Db
Construction materials	PP, PVDF, PP+CF
Diaphragms	PTFE+back up (santoprene) PTFE+back up (Hytrel) NBR, EPDM, SANTOPRENE, HYTREL
Intake/delivery connections	3" BSP G – Flange on request
Air connection	3/4"
Max. self-priming capacity	5 m
Max. flow rate	900 l/min
Max. head	70 m
Max. air supply pressure	7 bar
Max solid size (diameter)	10 mm
Max. operating temp.	PP 60°C, PVDF 95°C, P,P+CF 60°C
Weight PP	50 Kg
Weight PVDF	67 Kg

\* The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

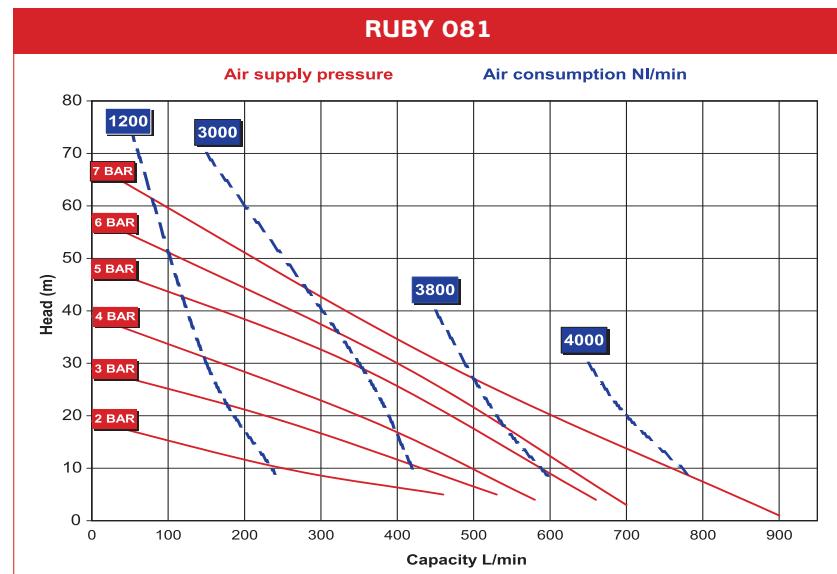



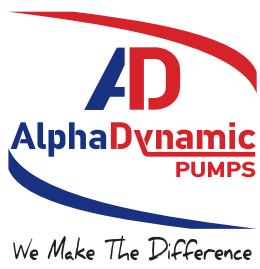

경기도 광명시 새빛공원로67, B동 1003호 (일직동, 광명역자이타워)

TEL. 02) 3286-0036~7

FAX. 02) 3286-0038

Mobile. 010-8888-3330

대표이사 : 김기판 사업자등록번호 : 119-86-77239